# AWESOMATIX A800RR

## SETUP SHEET

| | | | | | |
|---|---|---|---|---|---|
| NAME | Alexis | DATE | 25/10/26 | TEMP. °C AIR / TRACK | / |
| RACE | RND 1 IndoorSeries 26/27 | TRACK SURFACE | | ASPHALT ☐ | CARPET ☑ |
| TRACK | Savigny | TRACK LAYOUT | TECHNICAL ☑ | MIXED ☐ | FAST ☐ |
| COUNTRY | Suisse | TRACTION | LOW ☐ | MEDIUM ☑ | HIGH ☐ |
| CLASS | 17.5T | | | | |

## FRONT

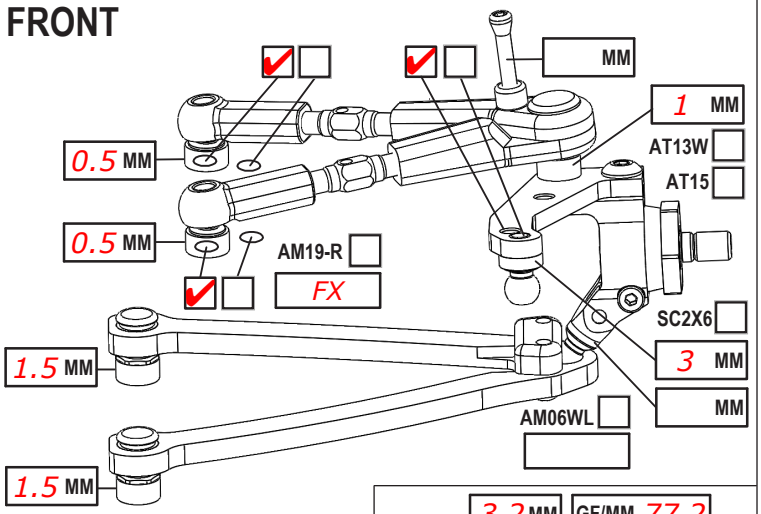


| | |
|---|---|
| CAMBER ANGLE / ° | -1 |
| CASTER ANGLE / ° | 4 |
| TOE ANGLE / ° | -1 |
| RIDE HEIGHT / MM | 5 |
| DOWNSTOP / MM | 5.6 |
| UPSTOP / MM | |
| ANTI-ROLL BAR Ø / MM | 1.2 |
| ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐ | |
| LOWER ARM EXTENSION / MM | 0 |
| STEER. ARM AM14LS ☑ | |
| 2ND SPRING SPR-P2 ☐ P1 ☐ | |
| WHEEL SPACER / MM | |
| DRIVE SPOOL ☑ DIFF ☐ | |
| DRIVE POSITION DOWN ☐ UP ☑ +1 ☐ | |
| DIFF OIL | DIFF SHIMS |

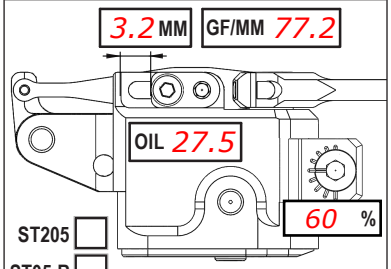


SHOCKS SETUP

| | | | |
|---|---|---|---|
| DAMPER | D4 ☑ | | |
| ROTOR | 2 HOLES ☑ | | |
| SPRING | STD ☐ | S ☑ | |
| SRS/RHS ARR. | I ☑ | II ☐ | |
| PSS SETUP | 30% ☐ | 25% ☐ | 15% ☐ |
| DAMPING LINEAR | ☐ | P1 ☐ | P2 ☑ |
| DAMPER SPACER / MM | 1mm | | |
| C45 | YES ☐ | NO ☑ | |

## REAR

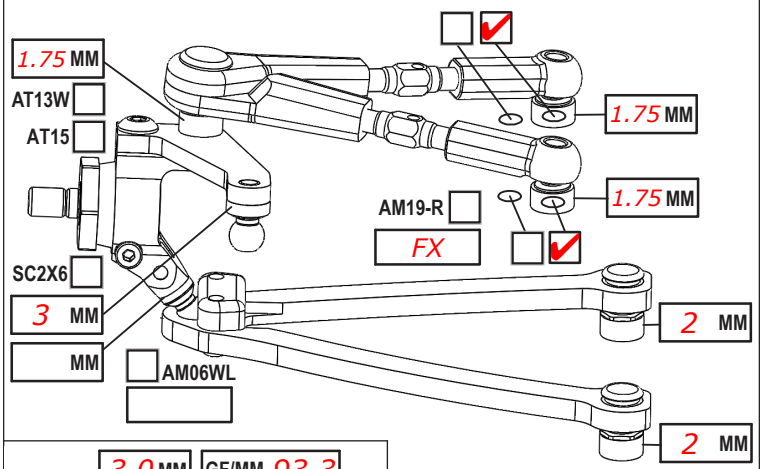


| | |
|---|---|
| CAMBER ANGLE / ° | -2 |
| CASTER ANGLE / ° | -3 |
| TOE ANGLE / ° | 2.5 |
| RIDE HEIGHT / MM | 5.2 |
| DOWNSTOP / MM | 4.8 |
| UPSTOP / MM | |
| ANTI-ROLL BAR Ø / MM | 1.1 |
| ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐ | |
| LOWER ARM EXTENSION / MM | 0 |
| STEER. ARM AM23-1 ☑ | |
| 2ND SPRING SPR-P2 ☐ P1 ☐ | |
| WHEEL SPACER / MM | |
| DRIVE DIFF ☐ | |
| DRIVE POSITION DOWN ☑ UP ☐ +1 ☐ | |
| DIFF OIL 5000 | DIFF SHIMS |

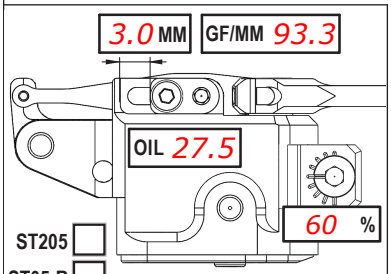


SHOCKS SETUP

| | | | |
|---|---|---|---|
| DAMPER | D4 ☑ | | |
| ROTOR | 2 HOLES ☐ | | |
| SPRING | STD ☐ | S ☑ | |
| SRS/RHS ARR. | I ☑ | II ☐ | |
| PSS SETUP | 30% ☐ | 25% ☐ | 15% ☐ |
| DAMPING LINEAR | ☐ | P1 ☐ | P2 ☑ |
| DAMPER SPACER / MM | 1mm | | |
| C45 | YES ☑ | NO ☐ | |

## CHASSIS FLEX AND WEIGHT SETTINGS

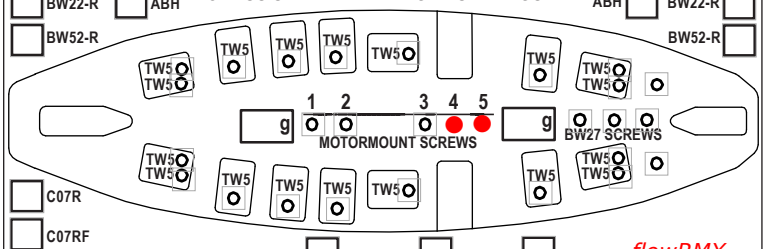


LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01RS ☐ OTHER flowRMX

BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER

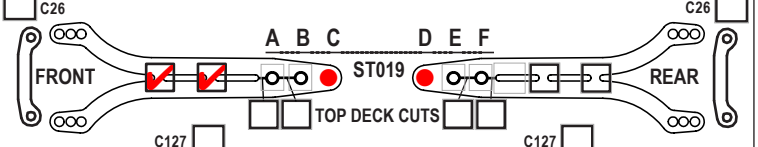


FRONT TOP DECK C127 ☐ C127S ☑ OTHER

REAR TOP DECK C127 ☑ C127S ☑ OTHER

SINGLE TOP DECK C27MMX ☐ OTHER

BELT TENSIONER AM279 ☐ OTHER

## BODY POSITION

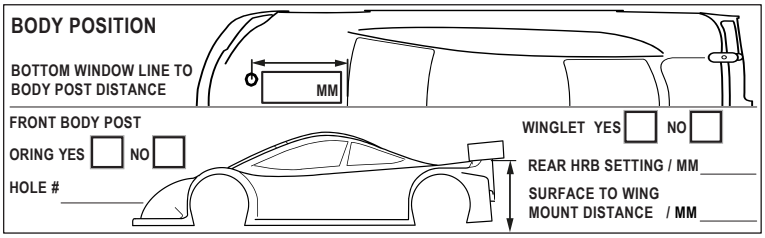


| | |
|---|---|
| TIRES | HUDY 28 |
| INSERTS | |
| SIDE WALLS GLUE Ø / MM F | 60 R |
| ADDITIVE | MR33 V5 |
| TOTAL WEIGHT | WEIGHT DISTRIBUTION % F R |
| NOTES: | |



TIME MIN. F 2x R 5min

| | | | |
|---|---|---|---|
| MOTOR LATERAL SHIFT / MM | | SERVO | |
| MOTOR | G4R 17.5T 38* | SERVOHORN / HEIGHT | 18mm |
| SPUR 100 PINION 34 RATIO 5.59 | | ACKERMANN POSITION | 0.5mm |
| BODY | Wolverine 0.4 | STEER TRAVEL IN 15 OUT 21 | |
| WING | Twister OG 0.5 | BATTERY | LRP Long 6300 (4.2) |
| ESC | | RECEIVER | |
| ESC SETTING | 22TR, 37BOOST, 17Turbo | RADIO | |
| BEST LAPTIME | 8.9 | QUALIF./FINAL POSITION | 8 / 6 |

COMMENTS:

BSSX Steering